


## Filter AF series



AF3000-03D    AF2000-02    AF3000-03A    AF5000-10

Symbol:




### How to order

AF	2000	-	02	D
Filter	Body size		Port size	Drain type
	1000		M5:M5	Nil: Manual drain
	2000		02:1/4	A: Semi automatic drain
	3000		03:3/8	D: Automatic drain
	4000		04:1/2	
	5000		06:3/4	
			10:1	

### Specification

Model	AF1000-M5 AF1000-MSA AF1000-MSD	AF2000-02 AF2000-02A AF2000-02D	AF3000-02 AF3000-02A AF3000-02D	AF3000-03 AF3000-03A AF3000-03D	AF4000-03 AF4000-03A AF4000-03D	AF4000-04 AF4000-04A AF4000-04D	AF4000-06 AF4000-06A AF4000-06D	AF5000-06 AF5000-06A AF5000-06D	AF5000-10 AF5000-10A AF5000-10D	
Port size RC(PT)	M5X0.8	1/4"	1/4"	3/8"	3/8"	1/2"	3/4"	3/4"	1"	
Capacity of bowl (cm <sup>3</sup> )	4	15	20	20	45	45	45	130	130	
Flow rate (L/Min)	110	750	1500	1500	4000	4000	6000	7000	7000	
Fluid	Air									
Proof pressure	1.5Mpa(15.3kgf/cm <sup>2</sup> )									
Max. operating pressure	1.0Mpa(10.2kgf/cm <sup>2</sup> )									
Ambient & fluid temperature	5-50 °C									
Nominal filtration rate	5µm									
Bowl material	Polyethylene									
Bracket		B240A	B340A	B340A	B440A	B440A	B540A	B640A	B640A	
Weight (kg)	0.07	0.19	0.29	0.29	0.55	0.55	0.58	1.08	1.08	
Main parts material	Body	Aluminum alloy								
	Bowl	PC								
	Bowl guard	AF1000~AF2000: without				AF3000~AF5000: with (Iron)				

### Dimension

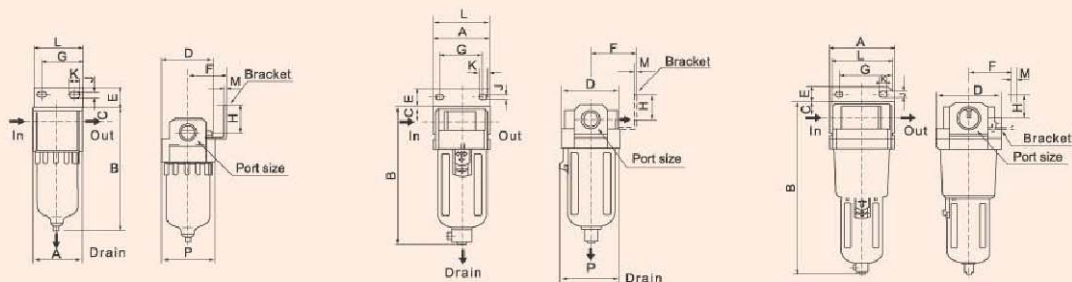

Model	Port size	A	B	C	D	E	F	G	H	J	K	L	M	P
AF1000	M5x0.8	25	66	7	25	-	-	-	-	-	-	-	-	26.5
AF2000	1/4"	40	97.5	11	40	17	30	27	22	5.4	8.4	40	2.3	40
AF3000	1/4", 3/8"	53	132.5	14	53	16	41	40	23	6.5	8	53	2.3	56
AF4000	3/8", 1/2"	70	168.5	18	70	17	50	54	26	8.5	10.5	70	2.3	73
AF4000-06	3/4"	75	172.5	20	70	14	50	54	25	8.5	10.5	70	2.3	73
AF5000	3/4", 1"	90	247.5	24	90	23	70	66	35	11	13	90	3.2	90